

CAVIUS™

WIRELESS
ALARM FAMILY
SMART
REMOTE




DANISH
DESIGN



100%
TESTED



WIRELESS
ALARM FAMILY
SMART
REMOTE

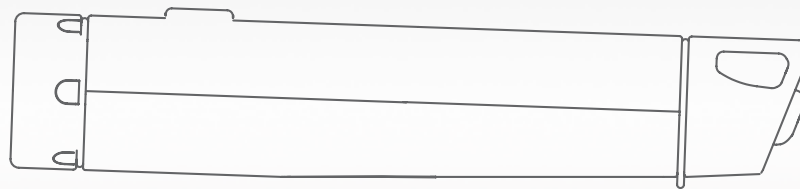

reddot award 2016
winner





PRODUCT TYPE: SMART REMOTE WITH BUILT IN REMOTE CONTROL

PRODUCT NUMBER: 9001-001

PRODUCT DATA:

PRODUCT TYPE:

Smart remote with emergency light.

USAGE:

Designed to alert with a rapid flashing warning light, vibration and buzzing when alarming and to remote control the CAVIUS Wireless Alarms Family. Torch function to find escape routes at night.

OPERATION AC/DC:

DC

BATTERY TYPE:

3 x DURACEL AAA batteries supplied with the Smart Remote.

INTERLINK FREQUENCY:

868MHZ

RANGE:

Minimum 100m in open field as a receiver, and within short range to silence an alarm. Range depends on the building materials and will need to be tested in each individual case.

LOW BATTERY INDICATION:

A short acoustic beep will sound to notify a low battery voltage.

INSTALLATION:

The body of the remote has a build-in magnet so that the remote can be installed on metal surfaces.

A lanyard can also be added to the end of the product so the remote can hang from a hook.

FLASHLIGHT:

Alarm conditions is indicated by a stroboscopic flashlight. A normal flashlight can also be activated by pressing the side button.

Flashlight will flash at 2 Hertz (2 times each second) to avoid photo sensitive epilepsy to be triggered.

PUSH BUTTON:

The Smart Remote is equipped with 3 switches: Sliding learn switch to connect to other alarms in the wireless family. Test/hush button at the end. Torch button on the side.

WARRANTY:

1 year



CAVIUS™

PRODUCT TYPE: SMART REMOTE WITH BUILT IN REMOTE CONTROL

PRODUCT NUMBER: 9001-001

PRODUCT DATA:

OPERATING TEMPERATURE:

+4°C to +38°C (tested from 0 degrees to 55 degrees).

OPERATING HUMIDITY:

Up to 90% RH non-condensing

APPROVALS:

EN60065
EN300-220
ROHS
REACH

CE TESTING INSTITUTE:

SGS

AWARDS:

Red Dot 2016 Design Awards



reddot award 2016
winner

ASSOCIATIONS:

Cavius is member of GIFSID, manufacturers' association of domestic fire safety equipment

STORAGE TEMPERATURE:

-20°C to +60°C

STORAGE HUMIDITY:

Up to 93% RH non-condensing

QUALITY ASSURANCE:

POWER CONSUMPTION:

100% tested

BATTERY VOLTAGE AND INTERNAL RESISTANCE:

100% tested

ALARM FUNCTION:

100% tested

INTERCONNECTION:

100% tested

VISUAL APPEARANCE:

100% tested

PACKING CONTENT:

100% tested

CONTACT



www.cavius.com

MANUFACTURER

Manufacturer: Cavius Aps, DK8600

CAVIUS™

WIRELESS 
ALARM FAMILY

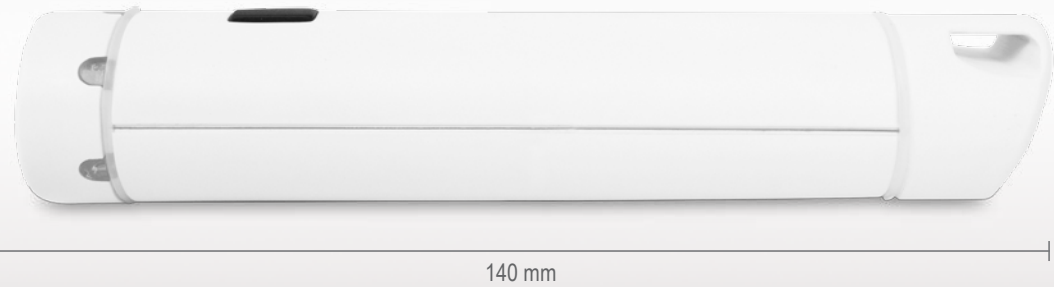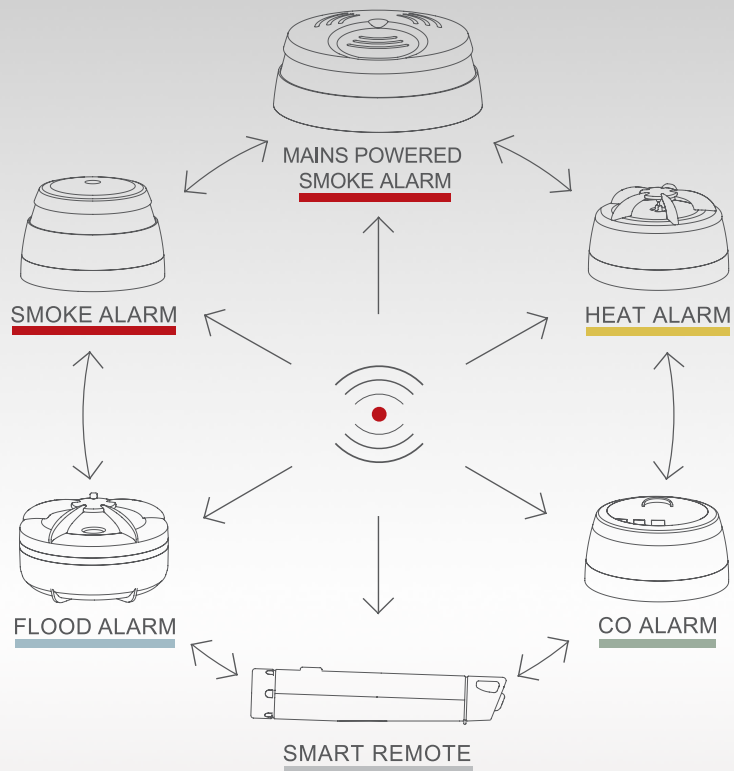

PRODUCT TYPE: SMART REMOTE BUILT IN REMOTE CONTROL

PRODUCT NUMBER: 9001-001

DISTRIBUTOR: